iPhone 3GS SIM Card Replacement

Written By: Ben Eisenman



INTRODUCTION

How to remove the SIM card.

TOOLS:


- SIM Card Eject Tool (1)

PARTS:

- iPhone 3G and 3GS SIM Tray (1)


Step 1 — SIM Card



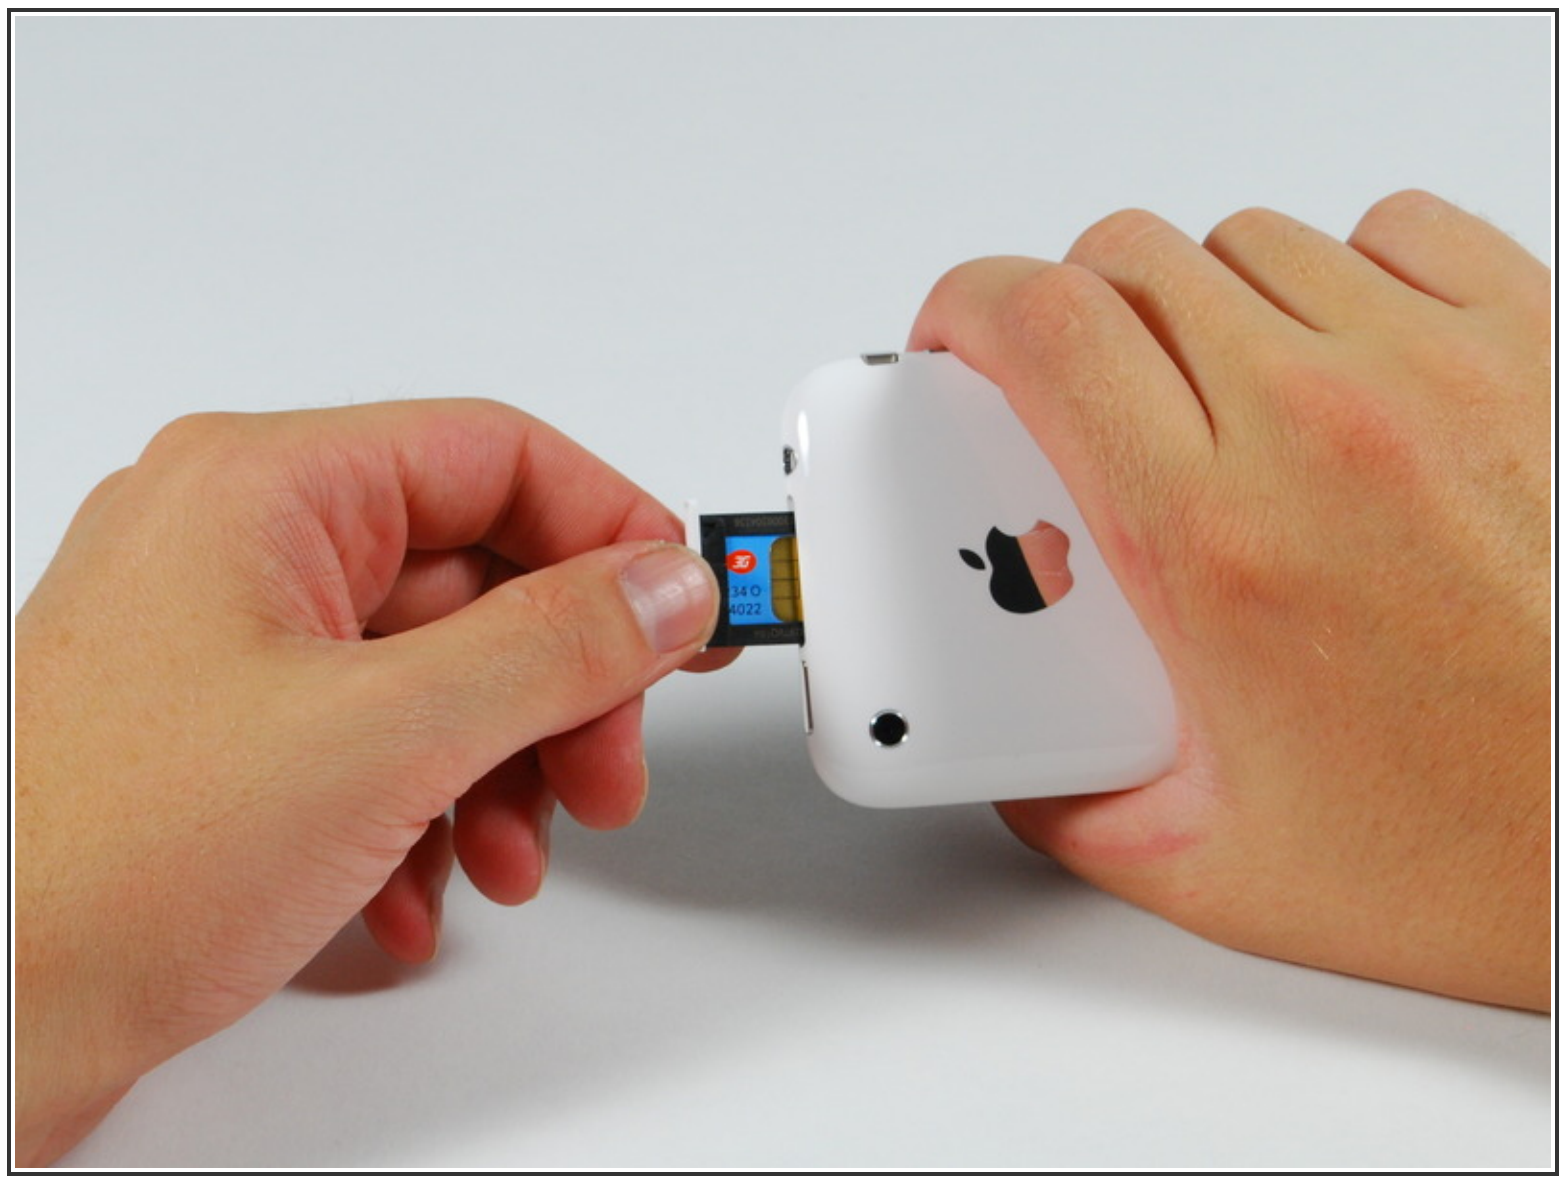

- Apple includes a "SIM eject tool" with the iPhone 3G. If you don't have this tool, don't worry, an ordinary paperclip works just as well.
- Insert your SIM eject tool or a paper clip into the hole next to the headphone jack.
- Press down on the tool until the SIM card tray pops out.

Step 2

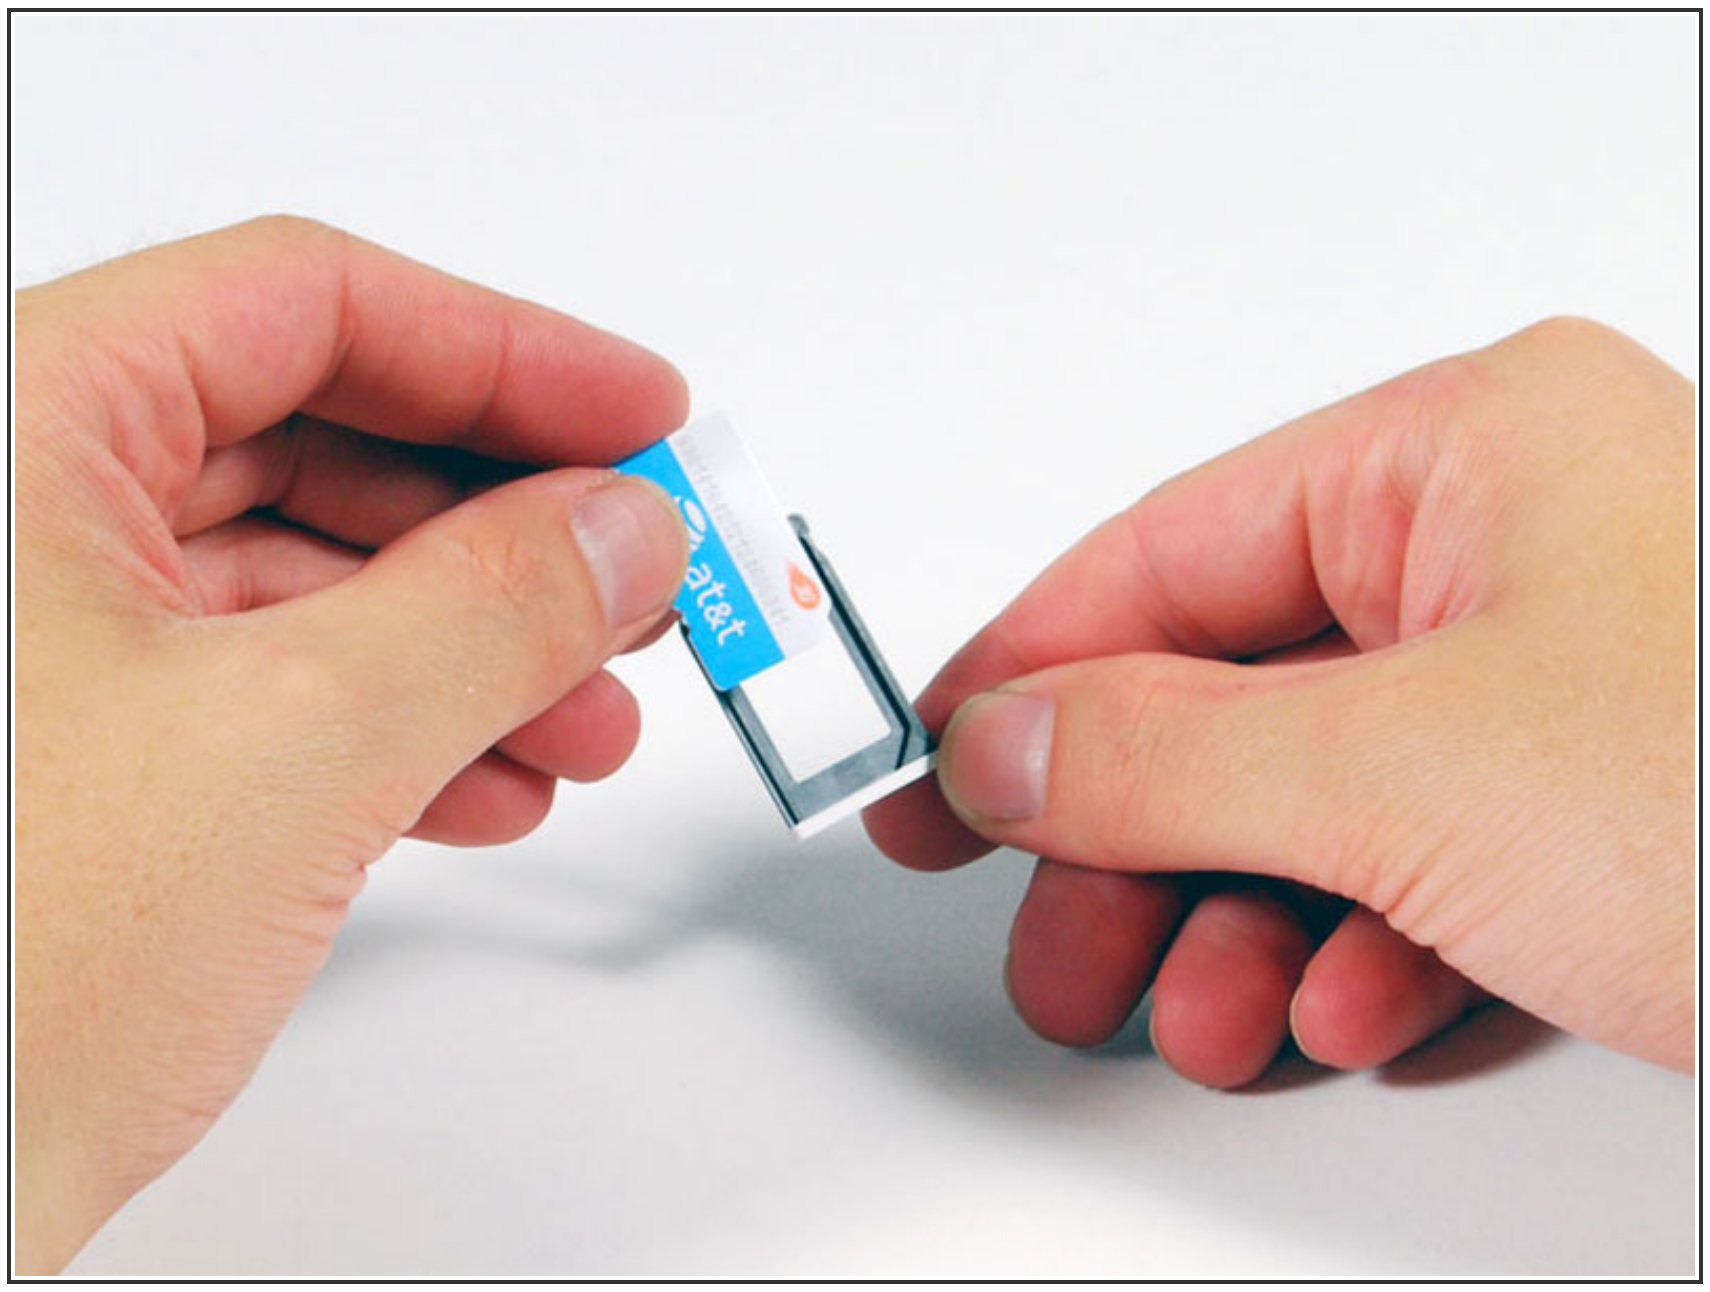

- Remove the SIM card from the SIM card tray.
- The cut-off corner should make it easy to reinstall the SIM card in the correct orientation.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-30 08:55:42 AM.